

SELBY ENGINEERING AND LIFTING SAFETY LTD. TEL: +44 (0) 1977 684 600

# technical sheet

# Bravo lightweight lever hoist

ref.: **T-2000**  
 rev. no.: **0**  
 date: **2/02**  
 page: **1/1**


BRAVO lever hoists are rugged, quality built hoists designed for reliable operations even in the toughest conditions.

Each hoist has features for easy operations, including:

- optional overload kit available
- wind-through chain system for fast hook positioning
- load chain manufactured in accordance with ISO T
- lightweight and portable with simple controls
- swivel hooks have large opening with large latch
- minimum effort to lift maximum load
- optional corrosion resistant chain available

All hoists are load tested and meet ANSI B30.21 and OSHA standards

Bravo models, available from 1/4 to 6 tons, are suitable for a wide variety of lifting, pulling and tensioning applications: for lifting and lowering loads in manufacturing and assembly operations, removing engines, rigging and moving loads, applying tension to conveyor belts and a wide range of other applications.

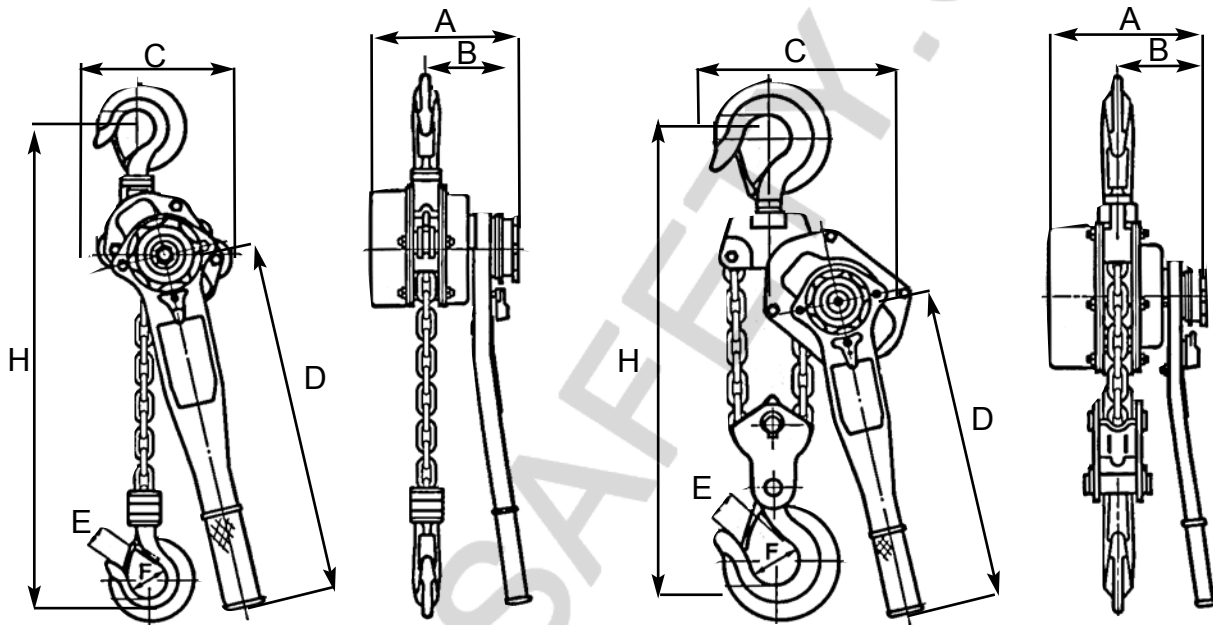

Capacity	lbs (daN/kg)	500 (250)	1,000 (500)	1,500 (750)	3,000 (1,500)	6,000 (3,000)	12,000 (6,000)
Standard lift	ft. (m)	5 (1.5)	5 (1.5)	5 (1.5)	5 (1.5)	5 (1.5)	5 (1.5)
Number of falls of chain		1	1	1	1	1	2
Effort to lift maximum load	lbs (daN/kg)	57 (26)	79 (36)	44 (20)	49 (22)	88 (40)	71 (32)
Weight	lbs (kg)	4 (2)	11 (5)	15 (7)	24 (11)	44 (20)	66 (30)
Chain dimensions	mm	4 x 12	5 x 15	6x18	7x21	10x30	10x30
Dimensions	A	3.6 (91)	4.3 (110)	5.5 (139)	7.0 (174)	7.9 (200)	7.9 (200)
	B	2.8 (70)	3.1 (80)	3.3 (84)	4.3 (108)	4.5 (115)	4.5 (115)
	C	2.8 (71)	4.8 (122)	6.0 (153)	6.3 (160)	7.3 (185)	9.1 (230)
	D	6.2 (157)	9 (228)	11.4 (290)	16.1 (410)	16.1 (410)	16.1 (410)
	E	0.8 (21)	0.9 (23)	0.9 (23)	1.2 (30)	1.5 (38)	1.6 (40)
	F	1.1 (28)	1.4 (35)	1.5 (37)	1.8 (45)	2.2 (55)	2.6 (65)
	H min.	9.2 (233)	12 (305)	11.9 (303)	14.4 (365)	19.1 (485)	23.6 (600)

