

CONTAINER SAFE SYSTEM

INSTRUCTIONS FOR USE

CONTAINER SAFE KIT – INSTRUCTIONS FOR USE

- EMPTY KIT FROM BAG
- LAY OUT THE KIT ON THE FLOOR
- EXTEND THE RED ROPE
- A RIGGING PLATE IS AT EITHER END OF THE RED ROPE



CONTAINER SAFE KIT – INSTRUCTIONS FOR USE

- INSPECT THE ROPES AND ENSURE THERE ARE NO SIGNS OF DAMAGE
- INSPECT THE HARNESS AND LANYARD AND ENSURE THERE ARE NO SIGNS OF DAMAGE
- INSPECT KARABINERS AND ROPE GRABS AND ENSURE EACH FUNCTIONS CORRECTLY AND THERE ARE NO SIGNS OF DAMAGE

CONTAINER SAFE KIT – INSTRUCTIONS FOR USE

- EXTEND THE WHITE ROPE FROM THE RIGGING PLATES AT A RIGHT ANGLE TO THE RED ROPE. THE SYSTEM SHOULD LOOK LIKE AN 'H'



- THIS IS HOW THE SYSTEM WILL LOOK ON TOP OF THE CONTAINER



CONTAINER SAFE KIT – INSTRUCTIONS FOR USE

- SECURE THE ADJUSTABLE LANYARD TO THE DORSAL (BACK) ATTACHMENT POINT ON THE HARNESS
- ONCE ON THE ROOF ADJUST THE LENGTH OF THE LANYARD TO ENSURE YOU THE USER CANNOT FALL OVER THE EDGE




CONTAINER SAFE KIT – INSTALLATION

- ATTACH (GOLD COLOURED) KARABINER FROM THE PAIR ATTACHED TO THE WHITE ROPE TO A LIFTING POINT




- ATTACH ONE LARGE KARABINER FROM THE PAIR AT THE OTHER RIGGING PLATE TO THE OTHER LIFTING POINT ON THE SAME SIDE OF THE CONTAINER

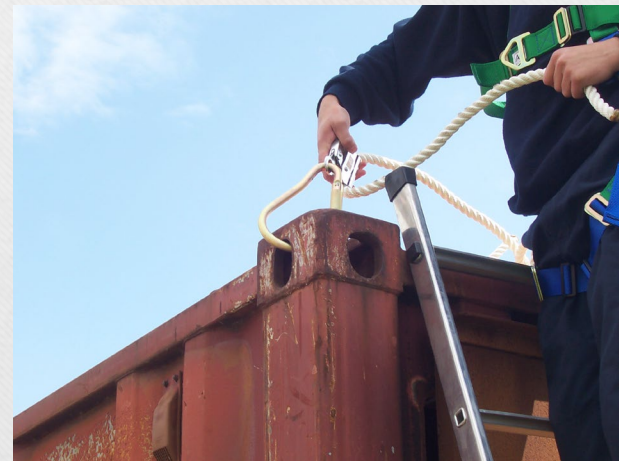

CONTAINER SAFE KIT – INSTALLATION

- **IF THE FAR SIDE OF THE CONTAINER CAN BE ACCESSED FROM THE GROUND**
- THROW THE REMAINING LARGE KARABINERS OVER THE CONTAINER AND ANCHOR TO THE LIFTING POINTS
- IN TURN PULL THE WHITE ROPE THROUGH THE ROPE GRABS ATTACHED TO THE LARGE KARABINER UNTIL ALL ARE UNDER TENSION

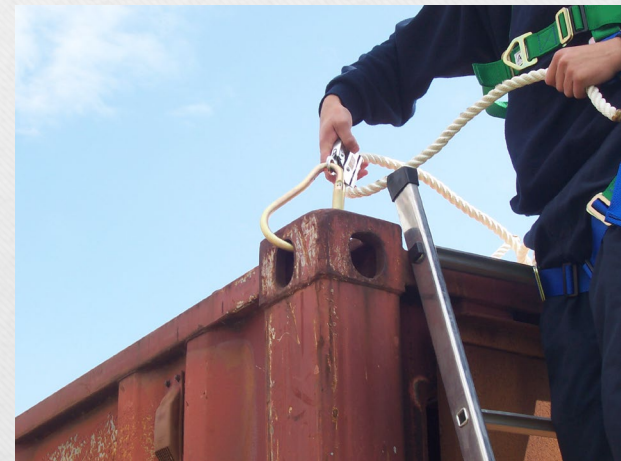

CONTAINER SAFE KIT – INSTALLATION

- **IF THE FAR SIDE OF THE CONTAINER CANNOT BE ACCESSED FROM THE GROUND – THROW THE REMAINING LARGE KARABINERS ONTO THE ROOF**
-
- ATTACH LANYARD TO LIFTING POINT THEN CLIMB ONTO THE ROOF OF THE CONTAINER USING LADDER WITH FOOTER
-
- ATTACH LANYARD TO THE RIGGING PLATE
-
- WHEN ON THE ROOF ATTACH LARGE KARABINER TO THE NEAREST LIFTING POINT ON THE FAR SIDE OF THE ROOF
-
- CLIMB DOWN. THEN CLIMB UP NEXT TO THE OTHER LIFTING POINT AND REPEAT



CONTAINER SAFE KIT – INSTALLATION

- ENSURE WHITE ROPE IS TENSIONED - PULL THE WHITE ROPE THROUGH THE ROPE GRABS AT EACH CORNER UNTIL EACH WHITE ROPE IS TIGHT AND THE RED ROPE IS CENTRAL
- ENSURE RED ROPE IS TENSIONED - PULL THE RED ROPE THROUGH THE ROPE GRAB ATTACHED TO THE RIGGING PLATE UNTIL THE RED ROPE IS TENSIONED



CONTAINER SAFE KIT – INSTRUCTIONS FOR USE

- DISCONNECT FROM LIFTING POINT AND ATTACH THE LANYARD TO THE OVAL MALLION ON THE RED ROPE



CONTAINER SAFE KIT – INSTRUCTIONS FOR USE

- IF THE USER WISHES TO ACCESS THE ENDS OF THE CONTAINER ROOF DISCONNECT FROM THE OVAL MALLION AND ATTACH TO ONE OF THE FREE HOLES ON THE RIGGING PLATE
- ENSURE THAT THE LANYARD LENGTH IS SET SO THAT THE USER CANNOT FALL OVER THE EDGE



CONTAINER SAFE KIT – INSTRUCTIONS FOR USE

- IMPORTANT POINTS
- **BEFORE USE ENSURE YOU UNDERSTAND HOW TO INSTALL AND USE THIS SYSTEM**
- **ENSURE THAT ALL ROPES ARE TENSIONED**
- **ENSURE THE ADJUSTABLE LANYARD IS CORRECTLY ADJUSTED SO THAT THE USER CANNOT FALL OVER THE EDGE**
- **IF THERE IS ANY DOUBT AS TO THE SERVICEABILITY OF THE SYSTEM – DO NOT USE**
- **IF YOU UNSURE OF HOW TO USE THE SYSTEM CORRECTLY – DO NOT USE.**