

Crosby ELIMINATOR® Fittings

Fatigue Rated

"QT"
QUENCHED & TEMPERED

QUIC-CHECK®

Crosby 8/10™



SEE APPLICATION AND WARNING INFORMATION

Para Español: www.thecrosbygroup.com

On Pages 239-240

A-1361



The Crosby ELIMINATOR® combines selected features and functionality of a master link, connecting link, grab hook and adjuster legs to provide you with one fitting that is suitable for applications that require an adjustable length chain sling.

A-1362




- Forged Alloy Steel - Quenched and Tempered.
- Innovative two piece design allows for maximum flexibility
- Individually Proof Tested with certification.
- The Crosby ELIMINATOR®, if properly installed and locked, can be used for personnel lifting applications and meets the intent of OSHA Rule 1926.550 (g) (4) (iv) (B).
- Suitable for use with Grade 100 and Grade 80 chain.
- Engineered to accommodate optional locking pins that can be inserted to "lock" the shortened chain legs into place.
- Fatigue rated at 1-1/2 times the Working Load Limit at 20,000 cycles.
- Use the A-1361 and A-1362 in combination to make 3 leg chain slings.
- "Look for the Platinum Color - Crosby Grade 100 Alloy Products."
- All sizes are **RFID EQUIPPED**.



Crosby ELIMINATOR®


A-1361 Single Hook

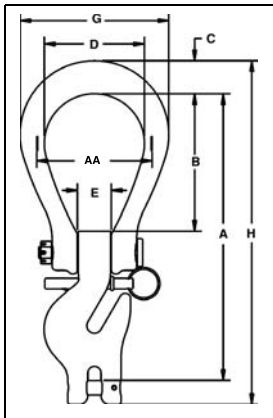

Chain Size		Frame Size	Working Load Limit (lbs.)*	A-1361 Stock No.	L-1361 Stock No.	Weight Each (lbs.)	Dimensions (in.)							
(in.)	(mm)						A	B	C	D	E	G	H	AA
1/4	7	2	4300	1049797	1049802	3.9	8.20	3.88	.90	3.00	.94	4.40	9.78	3.50
5/16	8	2	5700	1049804	1049809	3.9	8.18	3.88	.90	3.00	.94	4.40	9.78	3.50
3/8	10	3	8800	1049813	1049818	6.5	10.05	4.81	1.16	3.50	1.13	5.20	12.06	4.00
1/2	13	4	15000	1049822	1049827	13.5	12.88	6.00	1.63	4.13	1.31	6.39	15.57	5.00
5/8	16	5	22600	1049831	1049836	24.1	15.26	6.88	1.96	4.75	1.63	7.41	18.58	6.00

* Proof tested at 2.5 times the Working Load Limit.
Minimum Ultimate Load is 4 times the Working Load Limit.

A-1362 Double Hook

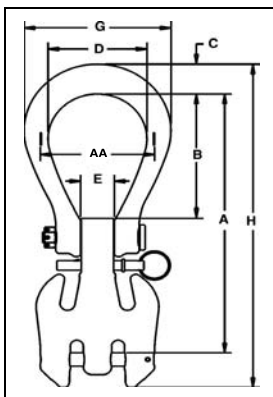

Chain Size		Frame Size	Working Load Limit (lbs.)*	A-1362 Stock No.	L-1362 Stock No.	Weight Each (lbs.)	Dimensions (in.)							
(in.)	(mm)						A	B	C	D	E	G	H	AA
1/4	7	2	8600	1049859	1049913	4.7	8.20	3.88	.90	3.00	.94	4.40	10.10	3.50
5/16	8	2	11400	1049868	1049922	4.7	8.18	3.88	.90	3.00	.94	4.40	10.10	3.50
3/8	10	3	17600	1049877	1049931	8.1	10.05	4.81	1.16	3.50	1.13	5.20	12.56	4.00
1/2	13	4	30000	1049886	1049940	17.3	12.88	6.00	1.63	4.13	1.31	6.39	16.25	5.00
5/8	16	5	45200	1049895	1049949	31.5	15.26	6.88	1.96	4.75	1.63	7.41	19.33	6.00

* Proof tested at 2 times the Working Load Limit.
Minimum Ultimate Load is 4 times the Working Load Limit.